INSTALLATION INSTRUCTION

BEFORE YOU START, HERE IS SOME IMPORTANT INFORMATION.

1) General Information

Please inspect this product upon delivery. Any issues must be reported to the supplier immediately. Any damage or defects reported later will not be accepted. Take care when handling glass parts to avoid heavy contact between the glass edges and any hard surface.

2) Additional Notes

- It is recommended that your mirror is installed by a qualified electrician in accordance with Electrical regulations and Building Regulations.
- Please ensure your mains supply is isolated before installation.
- Ensure the mounting surface is dry and suitably strong enough for the product.
- Special care should be taken when drilling walls to avoid hidden pipes or electrical cables.
- Make sure installation of the silicon rubber hermetic parts, and seal ring around the edge of cover well to guarantee the IP rating.
- We do not accept responsibility for any problems that may occur through incorrect installation.

3) Maintenance

It is recommended that mirrors are cleaned with a soft, dry, non-abrasive cloth. Do not use abrasive cleaning materials, or chemical cleaners as this will damage the mirror surface and edges.


TOOLS REQUIRED

| Description | Parts Image |
|--------------|-------------|
| Tape Measure | |
| Spirit Level | 0 0 |
| Pencil | |

| Description | Parts Image |
|---------------------------|-------------|
| Drill | |
| Cross Head Screwdriver | |
| Hammer | - |

WHERE TO INSTALL THIS MIRROR

This mirror is IP44 rating and is suitable for installation in Zones 2 or beyond.

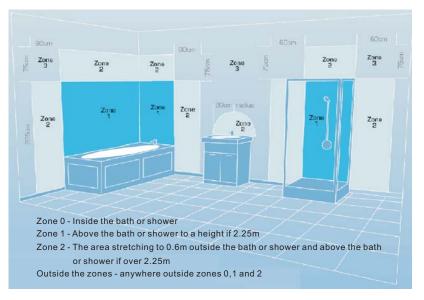

NOTE:

The packaging you have received with your product is 100% recyclable.

It must be disposed of in a safe and environmentally friendly way.

Suggest to take it to the local landfill site and discard it in the designated bins.

INSTALLATION STEPS

STEP 1

ISOLATE THE MAINS POWER SUPPLY TO THE ELECTRICAL FEED THAT WILL POWER YOUR MIRROR.

STEP 2

Put the 'Z' mounting bar on the wall. Mark the positions of the mounting holes on the wall, using a pencil and a spirit level.

STEP 3

Insert the wall plugs and screw the 'Z' mounting bar on the wall.

STEP 4

Wire the main power supply to the terminal block as belows.

BLACK OR BROWN --- TERMINAL MARKED L (LIVE)

WHITE OR BLUE --- TERMINAL MARKED N (NEUTRAL)

GREEN OR GREEN&YELLOW --- TERMINAL MARKED E (EARTH)

WARNING: This appliance must be earthed.

STEP 5


Slot the mirror cabinet onto the 'Z' mounting bar on the wall. Ensure the cabinet is clamped firmly by the screws on the wall.

STEP 6

Carefully put the glass shelves into the cabinet.

Peel off the protective film from the mirror and clean with a soft cloth.

WARNING: Always use the electrical appliances with a total power of less than 2000W on the socket of the mirror cabinet.

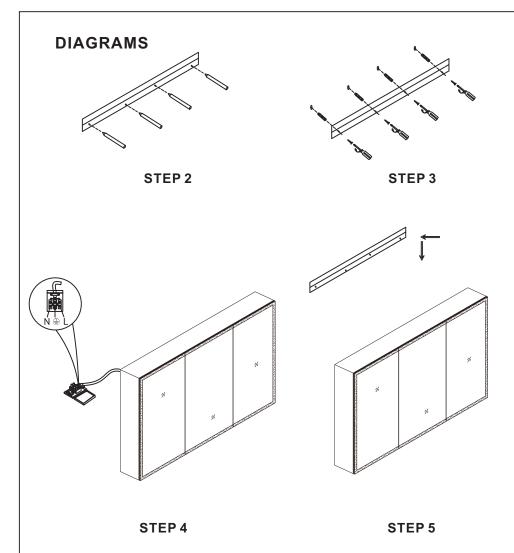

MANUAL TO THE CABINET WITH INFRARED SENSOR ONLY

- 1. Light up / off by moving your hand across the sensor in 0.5 second.
- 2. Adjusting color temperatures (CCT) between warm white and cool white by keeping your hand on the sensor over 0.5 second.
- 3. Detection distance of sensor: 3-8cm (the best distance is 3cm) **WARNING**: It suggest to install the product with a minimum distance of 25cm between the infrared sensor and any adjacent wall / countertop or any obstruction to ensure the correct function of the sensor.